



INSTALLATION INSTRUCTIONS FOR GYM T4 BS TREADMILL PADS




Gym T4 BS Treadmill Pads

- ❑ Make sure that the treadmill will be installed in a flat and clean horizontal surface.
- ❑ Treadmills can be heavy. Take all the necessary safety measures to avoid potential accidents and always follow the manufacturer's instructions.
- ❑ Place each pad close to the Treadmill foot that will rest on it. Be aware that the long pads are to be placed under the front feet and that the short pads are to be placed under the rear feet.



Front pad

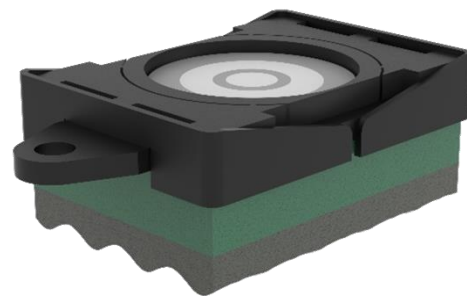


Rear pad



Gym T4 BS Treadmill Pads


- ❑ Place the treadmill without incline carefully on the pads, placing the front wheels of the treadmill with a slight offset forward:

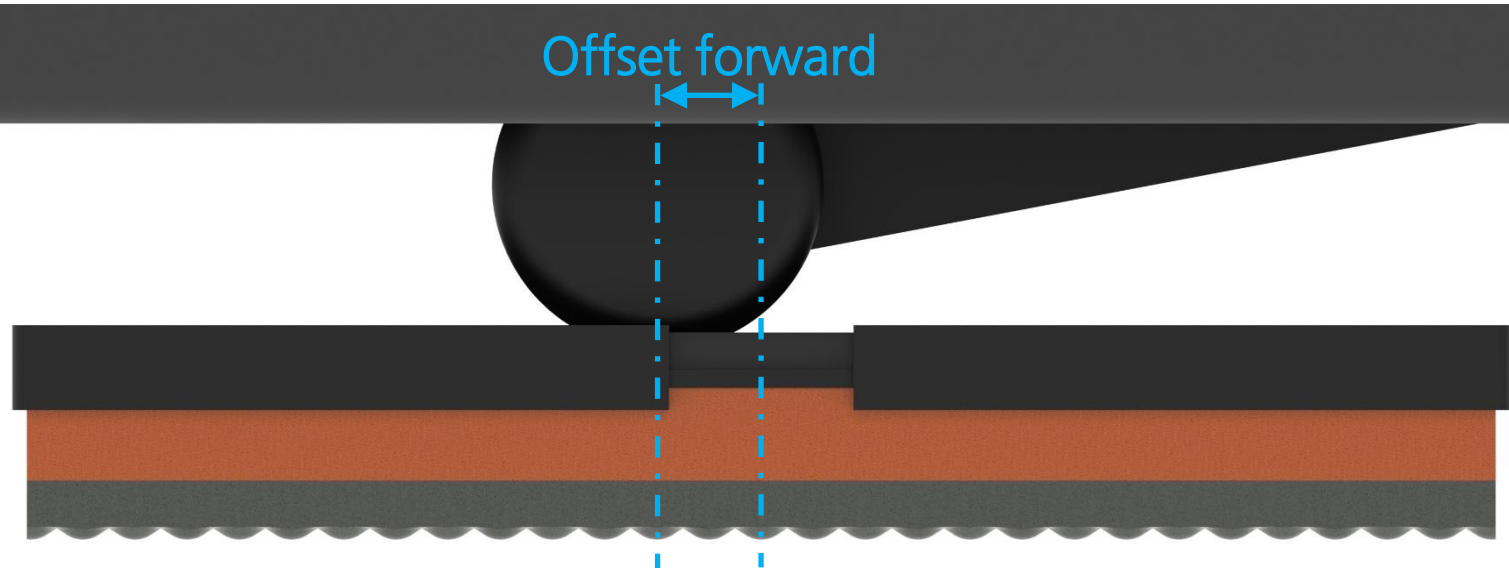



Gym T4 BS Treadmill Pads

- ❑ Check that when the treadmill is with its maximum incline the front wheel has a slight offset backwards:

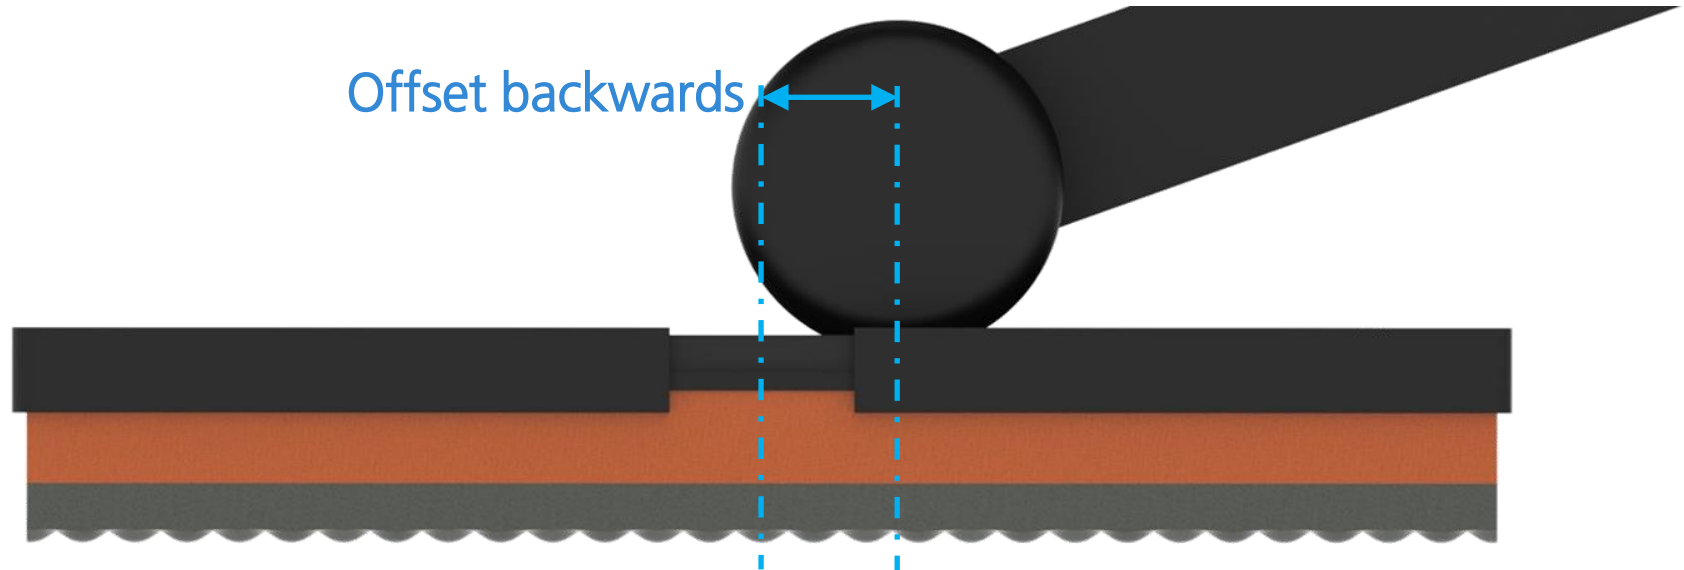



Gym T4 BS Treadmill Pads

- ❑ Check that left-side pads and right-side pads have similar deflections.
- ❑ From time to time, depending on the use of the treadmill, it might be necessary to adjust the position of the front pads so the front wheels have a slight offset forward (see page 3).



Using advanced technology, AMC MECANOCAUCHO focuses on the reduction of noise and vibration. More than 50 years of experience to solve a wide range of applications and environmental challenges in industrial or building acoustics. Specialised on isolation, attenuation and suspension solutions, we have a reputation for high quality, extraordinary performance and long service life. Our commitment to find the correct polymer technology optimize comfort, health and safety while creating a maximum business value through improved longevity, productivity and cost effectiveness.

WWW.MECANOCAUCHO.COM / WWW.AKUSTIK.COM

